

The Breezair Supercool EXS 220

Centrifugal fan evaporative cooler
Now available with Black Opal™ MINI-CELL^ Chillcel® Pads
and Wi-Fi Smart App

Permatuf™ corrosion-proof cabinet

The Breezair cabinet will not corrode or rust. The UV stabilised structural polymer material is the same type used to make acid baths, battery cases and some space satellite components.

Centrifugal fan

Centrifugal fans are the first choice of air conditioning engineers worldwide. The Breezair forward curved, centrifugal fans are made from injection-molded polypropylene. They are double-width, with aerofoil blades to provide high pressure performance and very low noise levels.



MagIQcool™ Controller (standard)

Operate one cooler from an easy to use, wall mounted thermostat controller. The controller comes with 20 m wiring loom, that can be extended up to a maximum length of 100 m.



Advanced touch screen MagIQtouch™ Controller (optional)

The technology includes in-built Installation Wizard, making the operating process simple. Coolers are supplied with a standard 20 m cable (40 m cable can be supplied as optional) to operate up to 60 coolers from a single MagIQtouch™ controller.

MagIQtouch™ BMS Control interface (optional)

BMS interface as optional with analogue and digital inputs.

NEW!!

Black Opal™ MINI-CELL^ Chillcel® Pads

Our revolutionary Black Opal™ Mini-Cell^ Chillcel® pads have transformed the aesthetics of our coolers as they seamlessly blend into their surroundings; maintaining our global leading Mini-cell^ Chillcel® pad technology, which increases surface area of the pads by 25%, dramatically multiplying cooling capacity and efficiency - BEYOND BELIEF!

^Patent pending



NEW!!

MagIQtouch™ Wi-Fi Smart App (optional)

Now you can control your Breezair evaporative cooler remotely using your smart devices.



Syncing with the MagIQtouch™ wall controller you can:

- View the live status of your unit
- Turn the system on/off or in free-cooling mode
- Adjust temperatures and fan speeds
- Override the Program Modes

HushPower® direct drive (ECM) motor

Exclusive to Breezair, this motor is super efficient and electronically controlled for optimum efficiency. Corrosion resistant, it's the quietest motor available and has unsurpassed reliability, reduced energy use and runs at variable speeds.



Non-clogging water distribution system

Breezair's non-clogging water distribution is one of the things that make it unique. The water distributor maximises cooling efficiency by supplying a continuous and balanced flow of water across the cooling pads. This is different to any other brand of evaporative coolers, which are subject to water flow variations for a number of reasons. Breezair's balanced flow ensures highest evaporation efficiency and maximum cooling.



Tornado® water pump

Designed, manufactured and tested by Seeley International, the Tornado pump epitomises reliability.

Clean and dry function

The cooler drains automatically when it's not in use, preventing algae growth and maintaining a clean cooler.

AUTOWeatherseal



The AUTOWeatherseal closes the cooler air discharge outlet automatically, thus significantly reducing natural air currents from circulating in and out of the building.

External Air Sensor (Optional)

Displays current outside temperature.

Intuitively optimises water and energy usage based on outside ambient conditions.

Extends the life of your air conditioner by automatically draining the water tank when temperature nears freezing.

WATERManager™ system

The Breezair WATERManager ensures optimum machine life with minimum maintenance by constantly checking water quality. It senses water quality with a probe that sends a signal back to the electronic module, which then ejects some dirty water and allows fresh water to enter.

Technical specifications

EXS 220

Airflow @ 80Pa	Industry standard (m³/h)	9140
Cooling capacity*	(kW)	15.1
Power consumption (total)	Watts max / min	1860 / 70
	Current max (amp)	9.0
Power supply	Voltage / Phases / Hz	220-240 / 1 / 50
Controller	Type	Digital
Fan	Type	Centrifugal
	Dia x width (mm)	460 x 380
Motor	Type	Direct drive inverter
	Speed max (rpm)	680 VAR
	Output Watts max	1500
	Overload & Fuse	Auto reset
	Enclosure	IP2X
Pump	Type	Centrifugal
	Motor	Synchronous
	Rating Watts (input)	25
	Flow rate (L/min)	21
	Voltage / Phases / Hz	230 / 1 / 50
	Overload	Auto reset
	Enclosure rating	IPX4
Cooling pad Chillcel	Size (mm)	800 x 635 (H) x 120 (4 pads)
	Pad area (m²)	2.03
Water	Tank capacity (L)	11
	Inlet (mm / inches)	12.7 / ½" male BSP
	Drain (mm / inches)	40 / 1½" male BSP
Shipping	Dimensions including pallet (mm)	1160 x 1160 x 955 (H)
	Volume (m³)	1.29
	Mass (kg)	87
	Operating (kg)	94
Connecting duct (raw edged)	Length x width (mm)	550 x 550

*Cooling capacity measured to Australian Standard AS2913-2000, ambient of 38°C dry bulb and 21°C wet bulb, with room exit temperature of 27.4°C.

COOLER DISCHARGE AIR TEMPERATURE CHART

Ambient Dry Bulb Temperature °C	Ambient Relative Humidity %								
	10	20	30	40	50	60	70	80	90
10	2.3	3.3	4.2	5.1	6.0	6.8	7.7	8.5	9.2
15	5.6	6.9	8.0	9.1	10.2	11.2	12.2	13.2	14.1
20	8.8	10.3	11.8	13.1	14.4	15.6	16.8	18.0	19.0
25	11.9	13.8	15.5	17.1	18.6	20.0	21.4	22.6	23.9
30	14.9	17.2	19.2	21.1	22.8	24.4	26.0	27.4	28.7
35	17.9	20.5	22.9	25.1	27.1	28.9	30.6	32.1	33.6
40	20.8	23.9	26.6	29.1	31.3	33.3	35.2	36.9	38.5
45	23.6	27.2	30.4	33.1	35.6	37.8	39.8	41.7	43.4
50	26.5	30.6	34.2	37.2	39.9	42.3	44.5	46.5	48.3


This chart represents approximate air temperatures based on cooling performance at sea level. From tests carried out to Australian Standard 2913.

25 Years
Corrosion-free cabinets guarantee

10 Years
Structural components guarantee

2 Years
Pump, motor & electronic control module guarantee


CABINET DETAILS

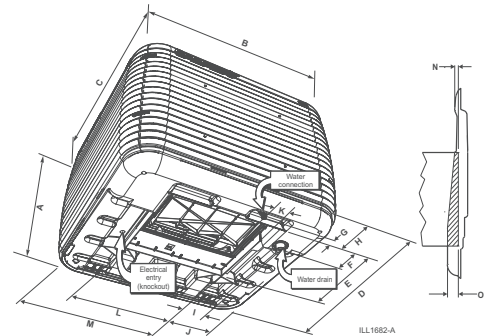

Model#	A	B	C	D	E*	F	G	H	I	J	K	L*	M	N	O
EXS 220	860	1160	1160	1108	555	109	38	182	81	274	118	555	834	38	84

Note: All dimensions are in mm. *Dropper dimensions

FAN CURVE

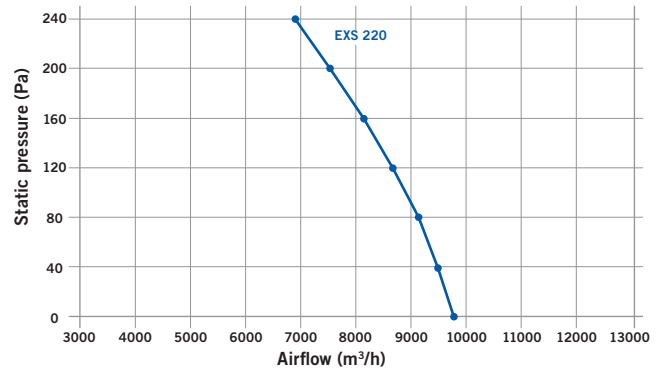

Model#	Industry STD Rating m³/h @ 80Pa	Motor W	Certified Air Delivery (m³/h) (static pressure Pa)						
			0	40	80	120	160	200	240
EXS 220	9140	1500	9790	9500	9140	8680	8140	7560	6910



eurosales@seeleyinternational.com
uksales@seeleyinternational.com

www.seeleyinternational.com



Seeley International France
320 Avenue Berthelot
69371 Lyon Cedex 08
France
Phone: +33 (0) 472 7847 80

Seeley International Italy
Loc. Policiano 72/M
52100 Arezzo Italy
Phone: +39 (0) 575 97189

Seeley International UK
Unit 11 Byron Business Centre,
Duke Street
Hucknall Nottingham
NG15 7HP United Kingdom
Phone: +44 (0) 115 9635630

